



## Universal automatic Bonder & Tester 5600C

### Bond System

<b>Testheads</b>	Pullheads – 100cN – 5000 cN Shearheads – 500cN – 50000 cN Tweezerhead – 100cN
<b>Bondheads</b>	5610, 5630, 5632, 5650, 5650HR

### Bonder / Tester Base

#### Axes

- Working area X/Y-axis 100x115mm
- Step resolution 0,25µm
- Repeatability <2µm

#### Hardware

- Dual Core PC, 1,6 GHz processor,
- 4 GB RAM, Ethernet, 4x USB-Hub Front
- Firewire CCD colour camera 1,4 MPixel
- Network-capable with TCP / IP server

#### Software

- Automatic repeat measurements on hybrids or COB using the programmable table movement
- Optional pattern recognition
- Statistics such as mean value, standard deviation, trend, cp, cpk, etc. Based on SQL Databan
- Export Format SQL, CSV, HTML

**Speed** 20 wires ≤ minute

**Dimenstions** W x D x H – 70 x 65x 70 cm, weight approx. 80kg

**Connections** 100–240 VAC, 1 Phase, 50/60 Hz, max 500 VA  
Ø 6mm standard vacuum tubing

### 5600C:

The automatic bond tester 5600C complements F&S Bondtec Semiconductor GmbH die- and wire- bonders. The PC controlled moving table allows any number of bonds to be tested automatically from a stored program.


Results can be analysed and output immediately or exported in a number of data base formats for subsequent analysis as desired. Powerful extended capabilities enable measurements such as force/time curves to be made and deliver more data about the quality of the bond tested.

Exchangeable measurement cartridges ensure rapid conversion to different force ranges. The calibration curves of all measurement cartridges are stored internally; additional heads for shear, peel and tweezer testing with customer-specific tools and jaws are available.


After a first programming a reproducible pull- or sheartest can be guaranteed for all following components.

## Workholder

Standard-Workholder  
for parts up to 4x4"  
with Vacuum und mechanical clamping

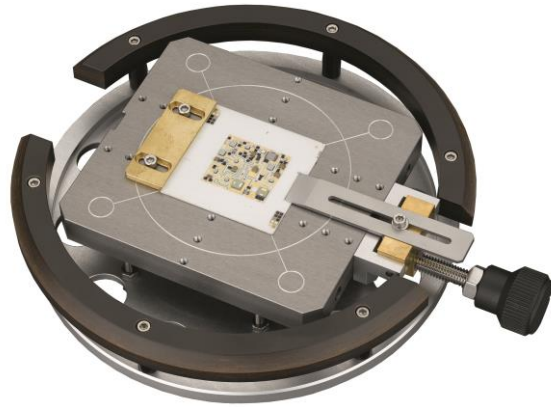


## Optional:

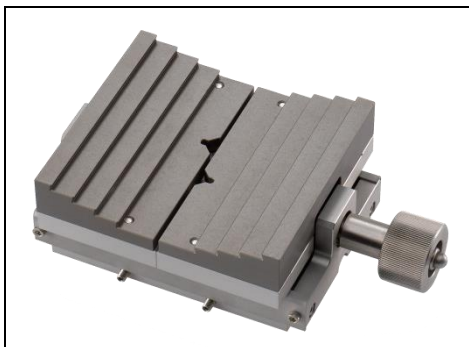

workholders up to 4x4"  
with jaws



TO workholder with  
mechanical clamping

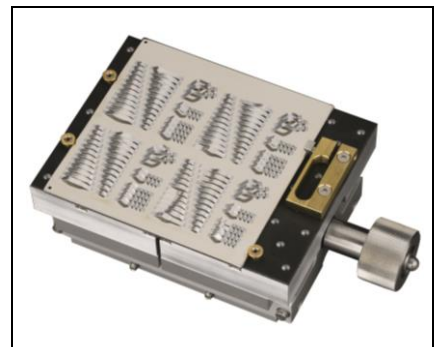

4x4" workholder with  
rubberized surface and  
mechanical clamping

### F&S Bondtec Semiconductor GmbH

Industriezeile 49a

A-5280 Braunau am Inn

Tel.: +43-7722-67052-8270

Fax: +43-7722-67052-8272

Mail: [info@fsbondtec.at](mailto:info@fsbondtec.at)

Web: [www.fsbondtec.at](http://www.fsbondtec.at)

