



Heavy-Ribbon Wedge Bonder

5850HR

Bond System

Wire types	Aluminium Ribbon up to 2000x300µm Copper wire 300-500µm on 4" spool
Bondhead	Wedge-Wedge for heavy wire, Standard Wedges of 2" Length, (optionally 90mm) Motorized wire spool (optional) Programmable Voice-oil bond force system 0 up to 1.800 cN (amplifiable up to 4.000cN)
Ultrasonic System	F&S Generator 60 kHz (optional 40, 90, 120kHz)

Bonder Base

Axes	<ul style="list-style-type: none"> • Working area X/Y-axis 200 x 150 mm; • Programmable step resolution 1µm • Programmable Z axis with 100 mm stroke;
Hardware	<ul style="list-style-type: none"> • Dual-Core PC with Windows OS, Ethernet, • USB 2.0/3.0, Colour Display 22" • GigE-CCD-Colour Camera, 5 Mpixel • Fully networkable in TCP/IP servers
Software	<ul style="list-style-type: none"> • From single bonds up to complex programmes, • Loop shapes can be stored in libraries • Optional pattern recognition
Control	<ul style="list-style-type: none"> • high-performance embedded ARM-System with Real-time operating system for precision • 1 wire / second
Dimensions	WxDxH 92x71x65 cm, weight approx. 80 kg
Connections	100-240 VAC, 1 Phase, 50/60 Hz, max 230 VA Ø 6 mm standard vacuum tubing
Heater controller	Integrated in the machine 0-250°C

The 58xx series:


The Heavy Ribbon Wedge-Wedge version of the automatic wire bonders in our Series 58xx featuring exchangeable bond heads.

A fully automatic mode makes it ideally suited for medium-scale production. Parts to be bonded are fed manually by the operator, but the bonds are produced completely without operator influence.


Thanks to the built-in pattern recognition. Single bonds can be made within seconds, making the machine perfect for R&D, Pilot manufacturing and middle volume production.

Workholder

Standard-Workholder
for parts up to 8x6"
with Vacuum und mechanical clamping

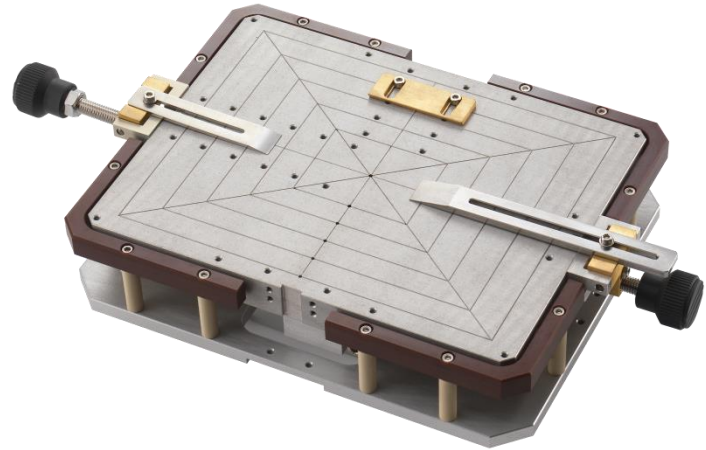

Optional:

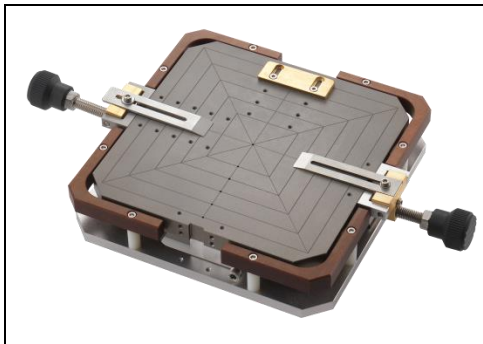

6 x6" workholder with Vacuum and mechanical clamping



TO Workholder with mechanical clamping



4x4" workholder with . rubberized surface and mechanical clamping

F&S Bondtec Semiconductor GmbH

Industriezeile 49a

A-5280 Braunau am Inn

Tel.: +43-7722-67052-8270

Fax: +43-7722-67052-8272

Mail: info@fsbondtec.at

Web: www.fsbondtec.at

